

LCS-100P 100 watt Polycrystalline Solar Module

KEY FEATURES

- One of Industry's most trusted modules with thousands installed
- Industry leading PTC performance
- High quality solar cells made in Germany
- Compatible with all major components and system designs
- Guaranteed no hot spots

PERFORMANCE UNDER STANDARD TEST CONDITIONS (STC)*

Model		LCS-100P
Maximum power	P _{max}	100+ W
Open Circuit Voltage	V _{OC}	21.6 V
Maximum power point voltage	V_{mpp}	17.5 V
Short circuit current	I _{sc}	6.19 A
Maximum power point current	I _{mmp}	5.72 A
*STC: 1000W/m², 25°C, AM 1.5		

ADATIONAL DATA

Power tolerance	+5/-0 W
Max system voltage USA NEC	600 V
Module efficiency	14.7%
Temp coefficient of P _{max}	-0.24%/ºF
Connector	MC4
Fire rating (UL790)	Class C
J-Box	IP65
Dimensions	39.68" X 26.57" X 1.4"
Weight	18 Lbs
Wind load	2400 Pa
Snow load	5400 Pa













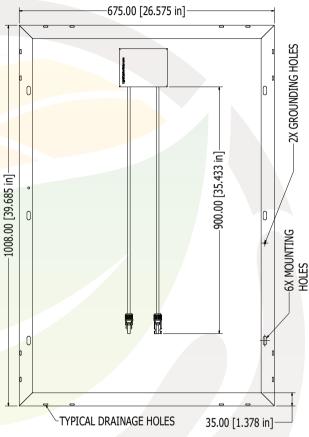

LINEAR PERFORMANCE WARRANTY

5 Year Product Warranty • 25 Year Linear Power Warranty



LightCatcher Solar guarantees a maximum performance degression of 0.8% anually in the course of 25 years, a significant added value compared to the two-phase warranties common in the industry.